


## Supplementary module for digital positioners Type 8049 from version V5


- Feedback 4-20 mA
- 2 limit signal transmitters
- Feedback on current valve position
- Feedback signal does not require calibration
- Feedback by 2 conductors
- 2 electrically isolated limit signal transmitters
- Limit signal transmitters freely adjustable (0-100%)
- Binary input
- Easy to retrofit

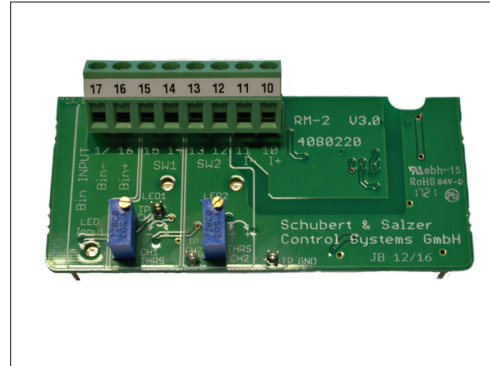


### Technical Information

Supply voltage	24V DC (±10%)
Output signal	4 - 20 mA
Max. adm. working resistance	< 700 Ohm
Temperature range	-4 . . . +167°F
Accuracy Feedback	± 1,5%
Limit signal transmitters	2 pieces
Switching range	adjustable 0-100%
Switching capacity of the limit sign.trans.	24V AC/DC , 70mA
Switching hysteresis	ca. 2.5%
Switching threshold binary input	~12V

### Electrical connection

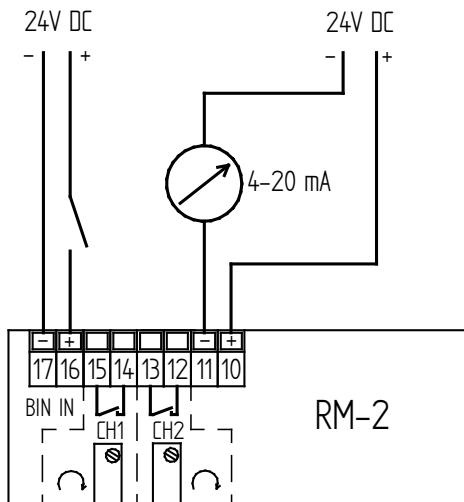

### Limit switch function

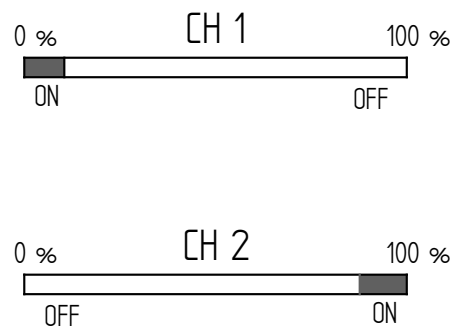

Text and pictures are not binding. We reserve the right, to alter the equipment.