


# Feedback module RM-4

Supplementary module for digital positioner  
Type 8049-2 wire from version V7

- Feed back 4-20 mA
- 2 limit signal transmitters

- Feedback on current valve position
- Feedback signal does not require calibration
- Feedback by 2 conductors
- 2 limit signal transmitters according Namur (EN 60947-5-6)
- Limit signal transmitters freely adjustable (0-100%) with software „DeviceConfig“
- Easy to retrofit

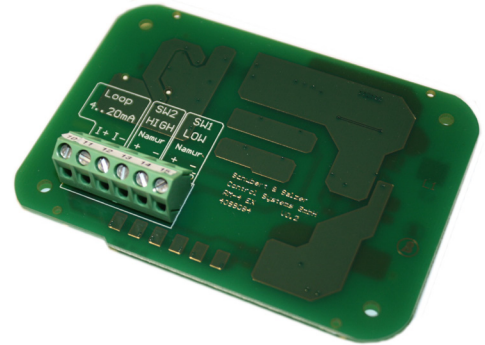

## Technical Information

Output signal	4 - 20 mA
Internal load	< 8V (400 Ω)
Temperature range	14 . . . +167°F
Accuracy Feedback	± 1,5%
Limit signal transmitters	2 pieces
Switching range	adjustable 0-100%
Switching hysteresis	ca. 2.5%

## Electrical connection

